



# Aistin IoT Device

## Sensing The Internet of Things



## Environmental Conditions+

# Aistin IoT Device Environmental Conditions+


Aistin IoT Devices are available with complete Aistin IoT software ready to use with Aistin Cloud Solution. Aistin IoT Device can also communicate with several Cloud Service providers. Aistin IoT Blue is a low energy wireless IoT device with onboard and external sensors. Aistin IoT Device is available in different component and configuration set-ups depending on the customers case and needs.

The Aistin IoT Device supports Bluetooth 5, LoRaWAN or 4G NB-IoT/CatM1 and provides radio connectivity with its integrated PCB antenna. Smart power control enables long usage times with rechargeable batteries or with primary batteries, from months to several years depending on your application.

The Aistin IoT Device is equipped with versatile sensors integrated onto the same unit



Aistin IoT Device is available with IP65 (picture above) is with plastic covers.

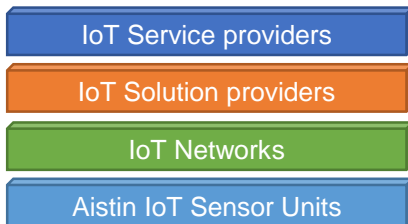

We can provide whole end-to-end IoT system with our Aistin Cloud Services. Aistin IoT Device can also communicate with most IoT Solution providers like MS Azure, Cumulocity, Things Networks and LorIoT.


With the Aistin Sensor Scanner Application, you can read sensor values over the Bluetooth. Local configuration and setup is also possible using the Bluetooth connection.



## USAGE EXAMPLES

- > Indoor air quality measurements
- > Ventilation control in home, school or office
- > Warehouse ventilation measurement
- > Condition monitoring in the real time
- > Home automation and monitoring

Server independent  
customizable Docker based  
modular Aistin Cloud Solution  
allows users to easily monitor  
and manage IoT devices via  
internet.

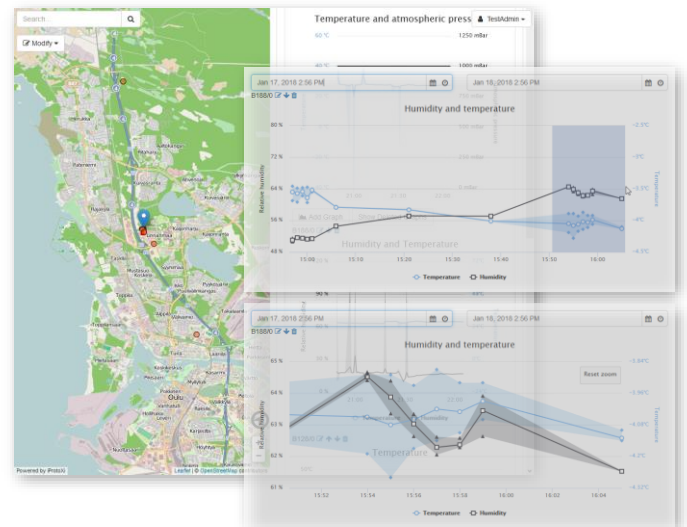

## TECHNICAL SPECIFICATION

- ❑ Device Management using cloud services
- ❑ LoRaWAN 868MHz or
- ❑ 4G NB-IoT/CatM1 all bands
- ❑ Bluetooth 5
- ❑ Firmware updating over-the-air
- ❑ Dimensions 101 x 57 x 22/32 mm
- ❑ Operating temperature -25 - +60 °C
- ❑ Powering
  - 3 x 3,6V AA Primary batteries or
  - optional USB chargeable 3000mAh battery
- ❑ Battery life time\*
  - 5-6 years
    - Operating temperature +20°C
    - Measurement and network connection once in the day in decent coverage
  - ~3 years
    - Operating temperature -20°C
    - Measurement and network connection once in the day in decent coverage
- ❑ 6D-accelerometer/gyroscope
  - Acceleration range of  $\pm 2/\pm 4/\pm 8/\pm 16g$
  - Angular rate range of  $\pm 125/\pm 250/\pm 500/\pm 1000/\pm 2000dps$
- ❑ Humidity
  - Accuracy of  $\pm 1.5 \%RH$  and  $\pm 0.1 ^\circ C$
  - Resolution 0.01 %RH
  - Hysteresis at 25°C  $\pm 0.8 \%RH$
- ❑ Barometer
  - Pressure Range: 300hPa to 1100hPa
  - Relative Pressure Accuracy:  $\pm 0.12hPa(Typ)$
  - Absolute Pressure Accuracy:  $\pm 1hPa(Typ)$
- ❑ Temperature
  - Range -40 - +80 °C
  - Accuracy  $\pm 0.1 ^\circ C$
  - Resolution 0.01 °C
- ❑ CO<sub>2</sub>\*
  - Measurement range 400ppm to 10000ppm
  - Accuracy  $\pm 30ppm +3\%$
- ❑ TVOC air quality
  - Detect hazardous materials and unhealthy conditions (e.g. fumes from construction materials)
  - Ethanol 0-1000ppm
  - Three operation modes, air quality (standard and low power) and odor
- ❑ Optional sensors
  - GPS/(GNSS)
  - Differential air pressure
  - IR laser distance
  - 3D-accelerometer
  - 6D-accelerometer/magnetometer
  - Structural humidity sensor
  - PIR Motion Sensor

*\*CO<sub>2</sub> Sensor consumes remarkably plenty of battery life time and therefore external USB power source is preferred.*